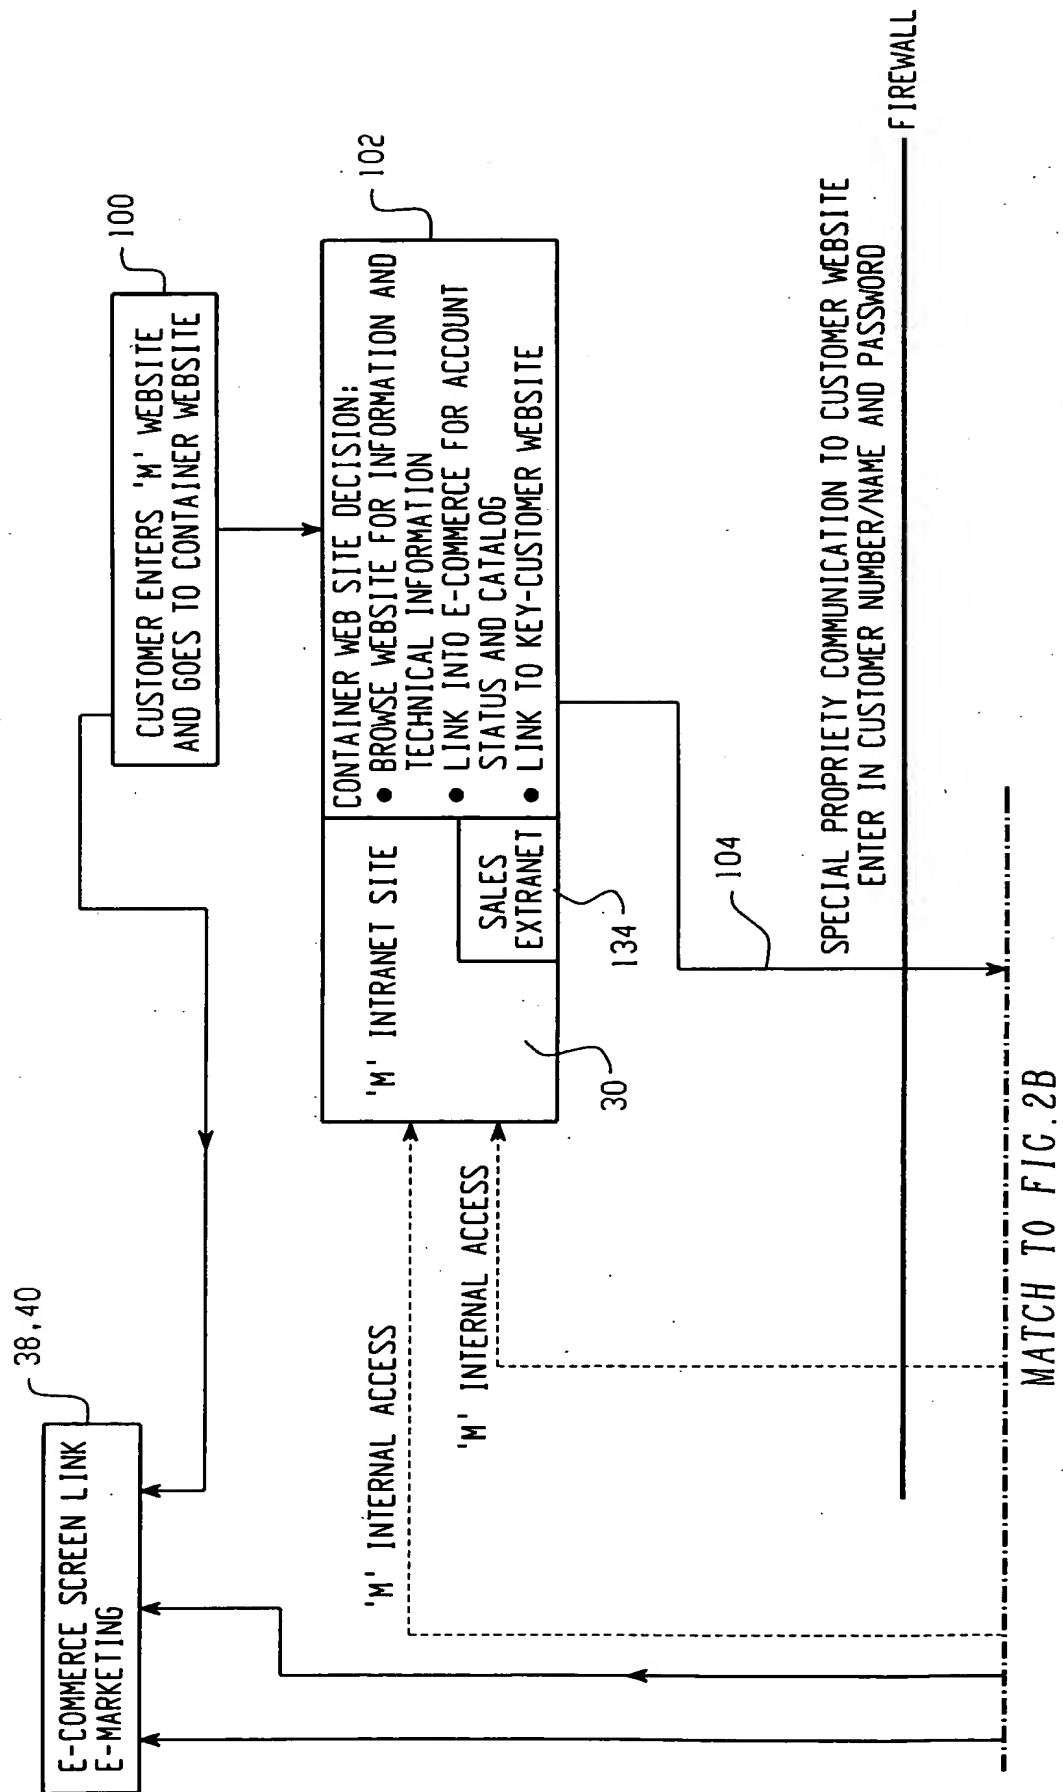


Fig. 2A

20



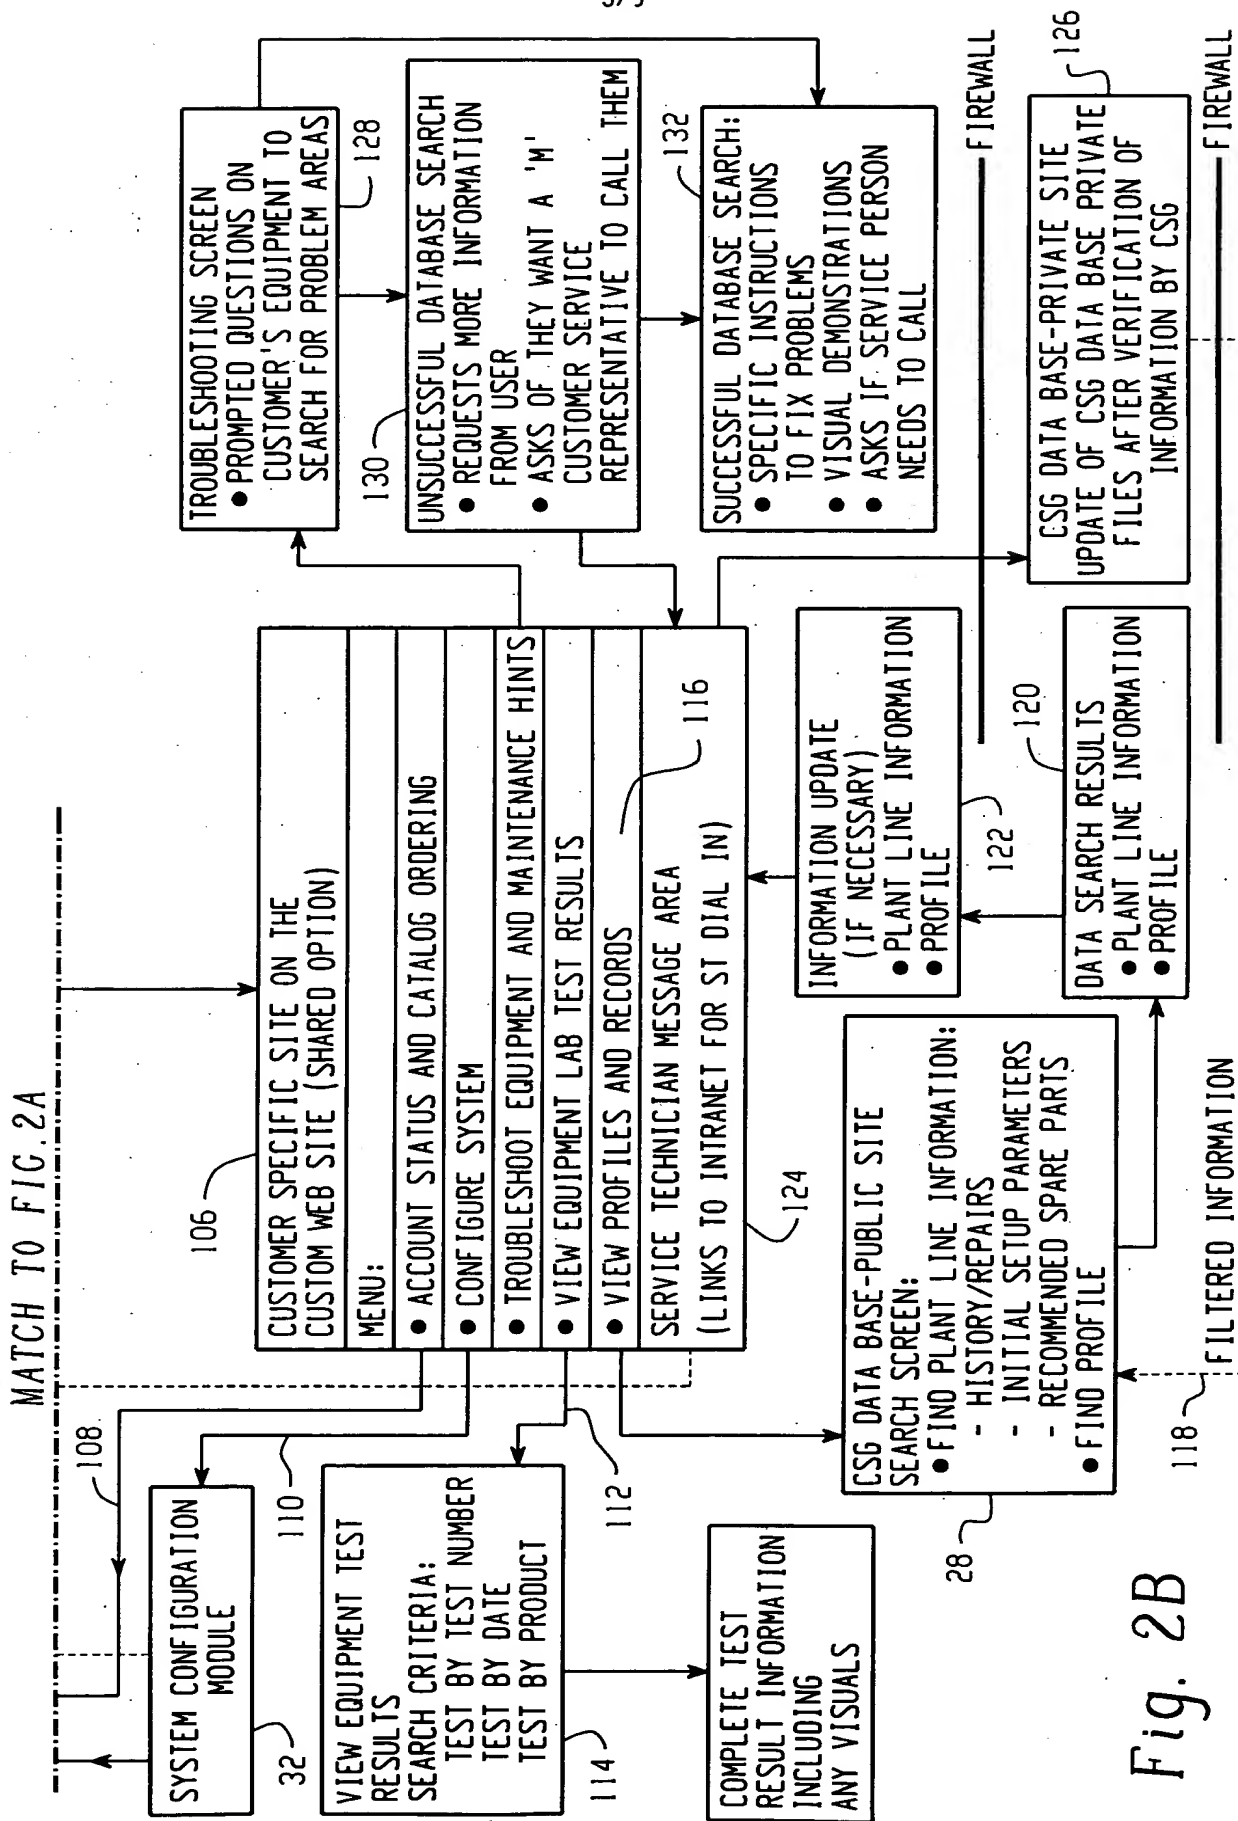


Fig. 2B

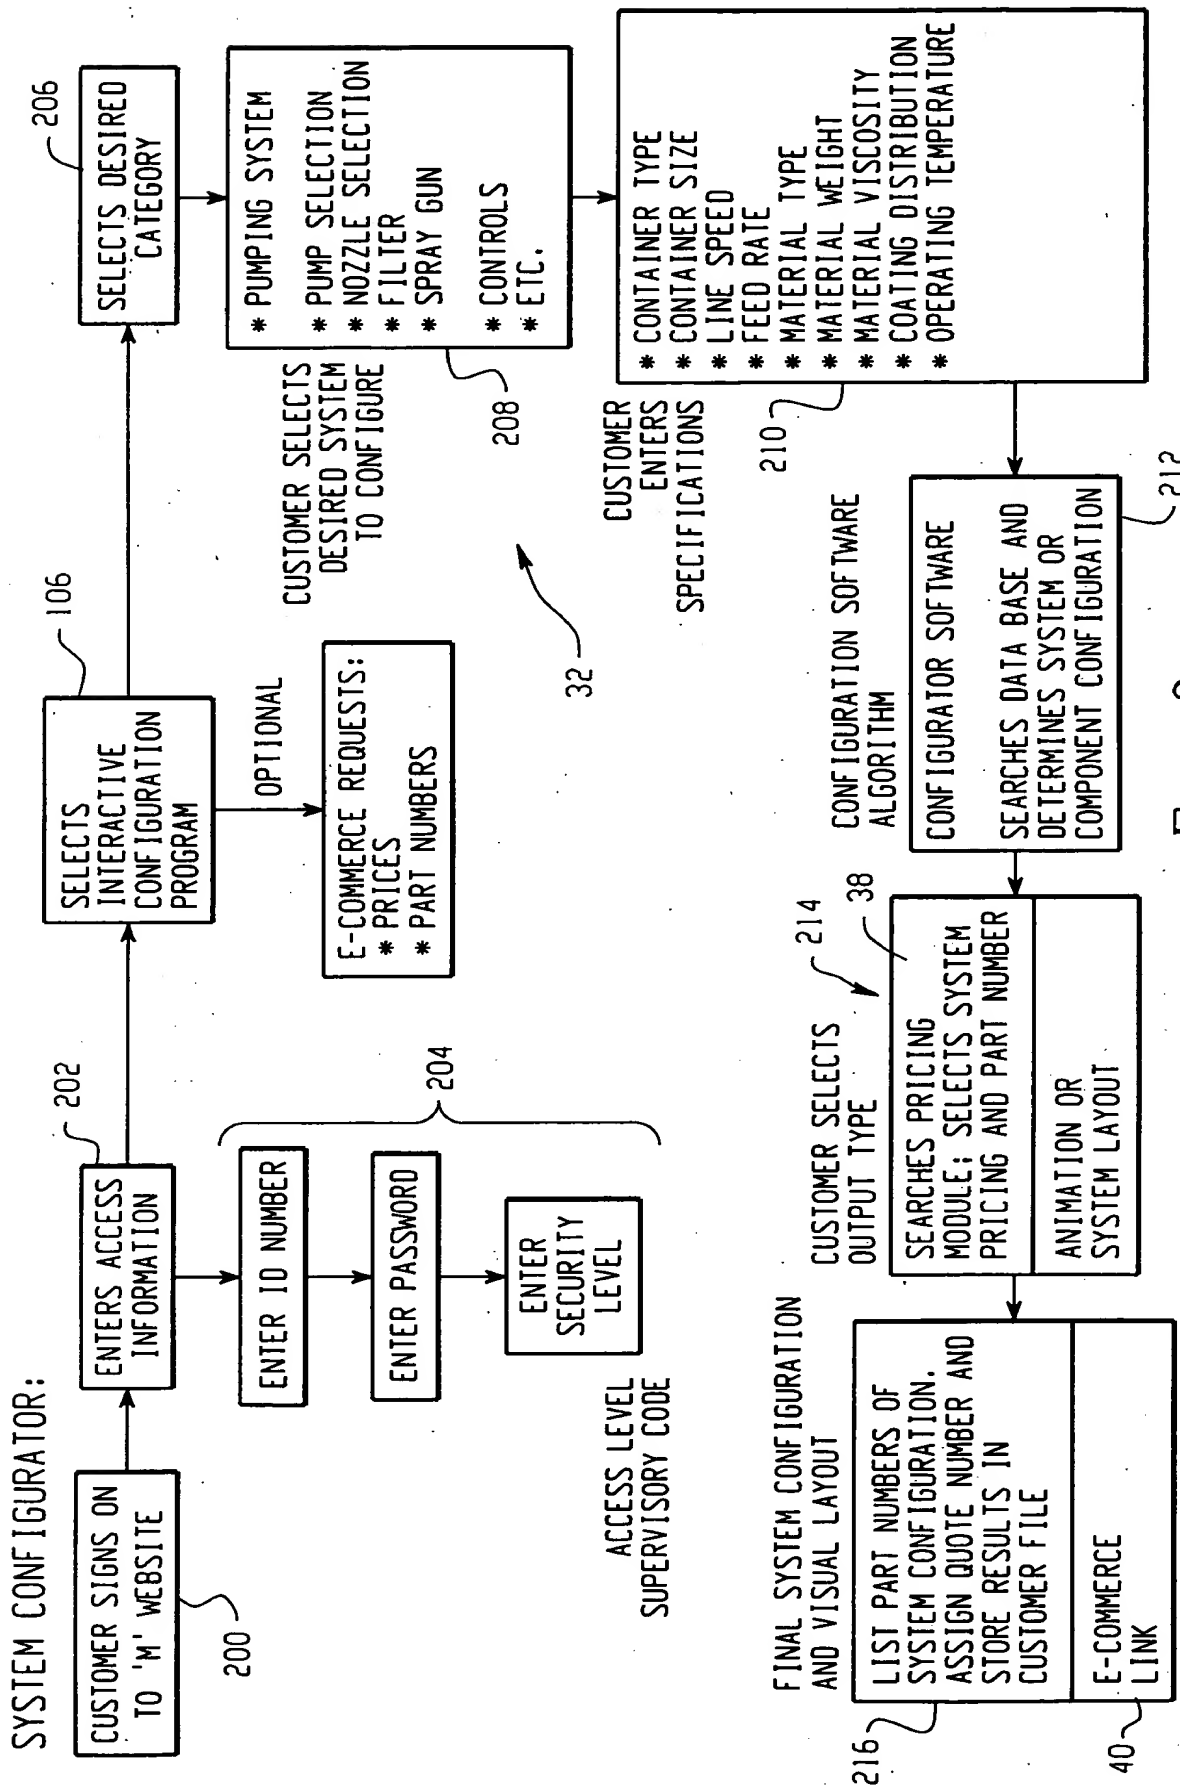


Fig. 3

LIQUID SYSTEM CONFIGURATOR

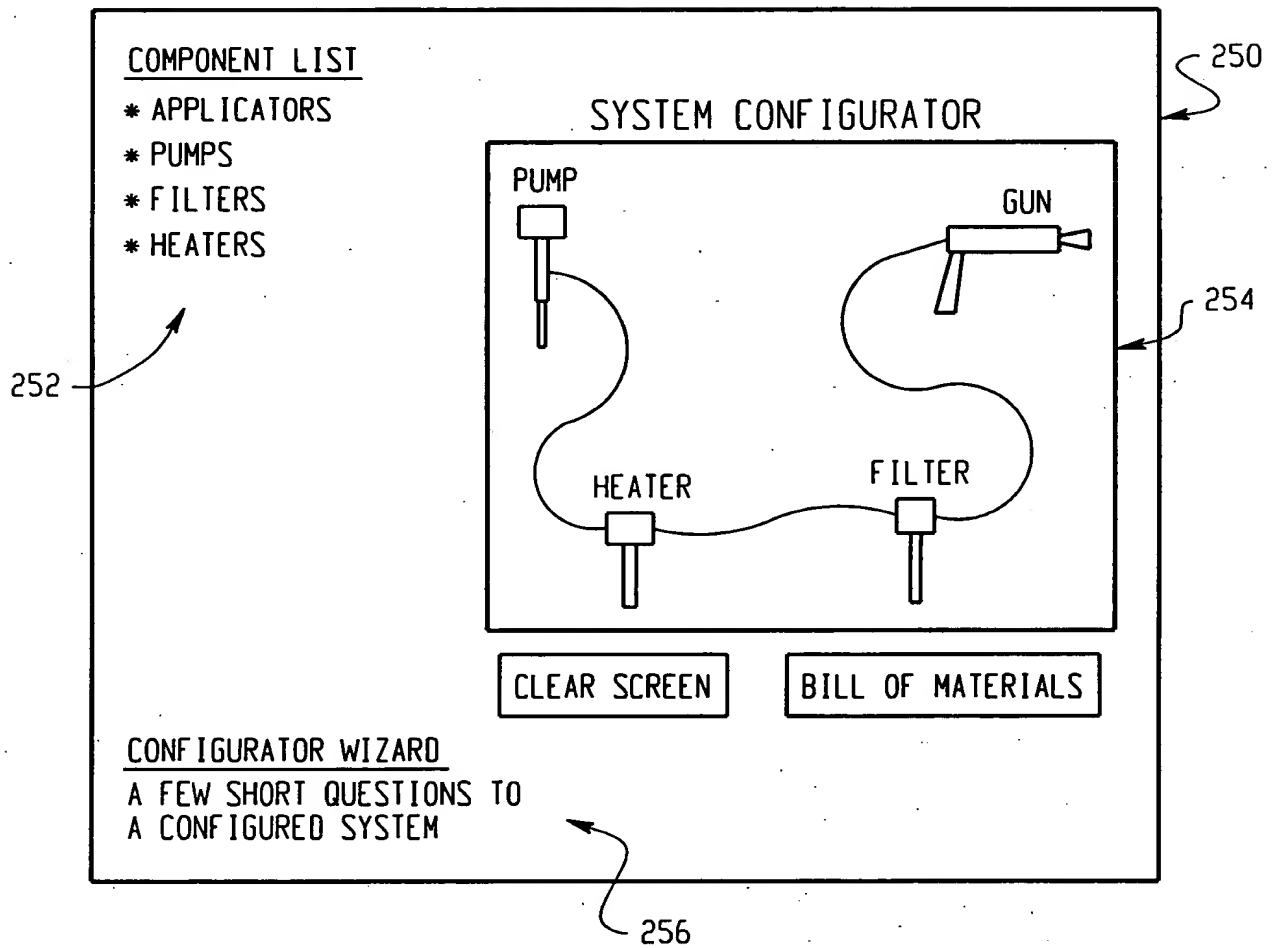



Fig. 3A

CONFIGURATOR WIZARD

- | | | | | |
|---------|---|------|---|--|
| STEP #1 | HIGH PRESSURE
> 100 PSI
FLUID PRESSURE | -OR- | LOW PRESSURE
< 100 PSI
FLUID PRESSURE | <input type="checkbox"/> HP
<input type="checkbox"/> LP |
| STEP #2 | ELECTROSTATIC | -OR- | NON-ELECTROSTATIC | <input type="checkbox"/> E/S
<input type="checkbox"/> NON E/S |
| STEP #3 | MANUAL | -OR- | AUTOMATIC SYSTEM | <input type="checkbox"/> MANUAL
<input type="checkbox"/> AUTOMATIC |
| STEP #4 | WATER BORNE | -OR- | SOLVENT BORNE MATERIAL | <input type="checkbox"/> WATER BORNE
<input type="checkbox"/> SOLVENT BORNE |
| STEP #5 | HEATED | -OR- | NON-HEATED SYSTEM | <input type="checkbox"/> HEATED
<input type="checkbox"/> NON-HEATED |
| STEP #6 | ASSIGN PRIORITIES TO THE
FOLLOWING FACTORS 1 - 4 | | | <input type="checkbox"/> CAPACITY/THROUGH
<input type="checkbox"/> TRANSFER EFFICIENCY
<input type="checkbox"/> FINISH QUALITY
<input type="checkbox"/> LABOR SAVINGS |
| STEP #7 | CONFIGURE SYSTEM NOW -OR- MODIFY CHOICES | | | |

258

CONFIGURED SYSTEM

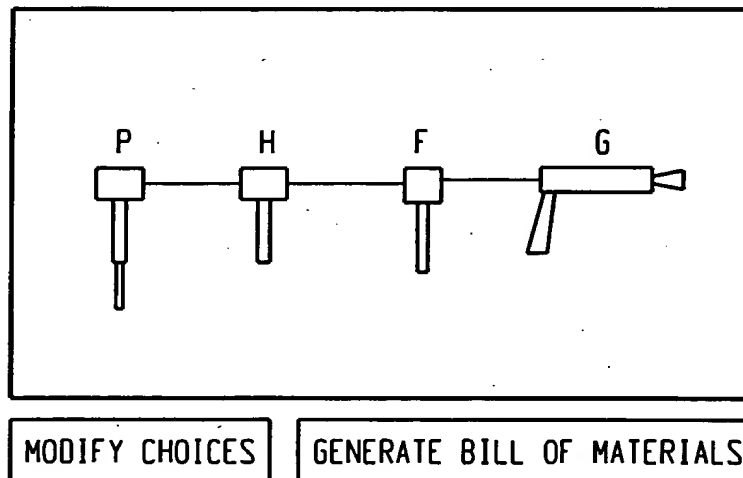

BILL OF MATERIALS:

- 1 ELECTROSTATIC SPRAY GUN
1 648 15:1 CORROSION RESISTANT PUMP
1 NH4 HEATER
1 FLUID FILTER

- 260


262

QUOTATION

AVAILABILITY

MODIFY CHOICES

Fig. 3B

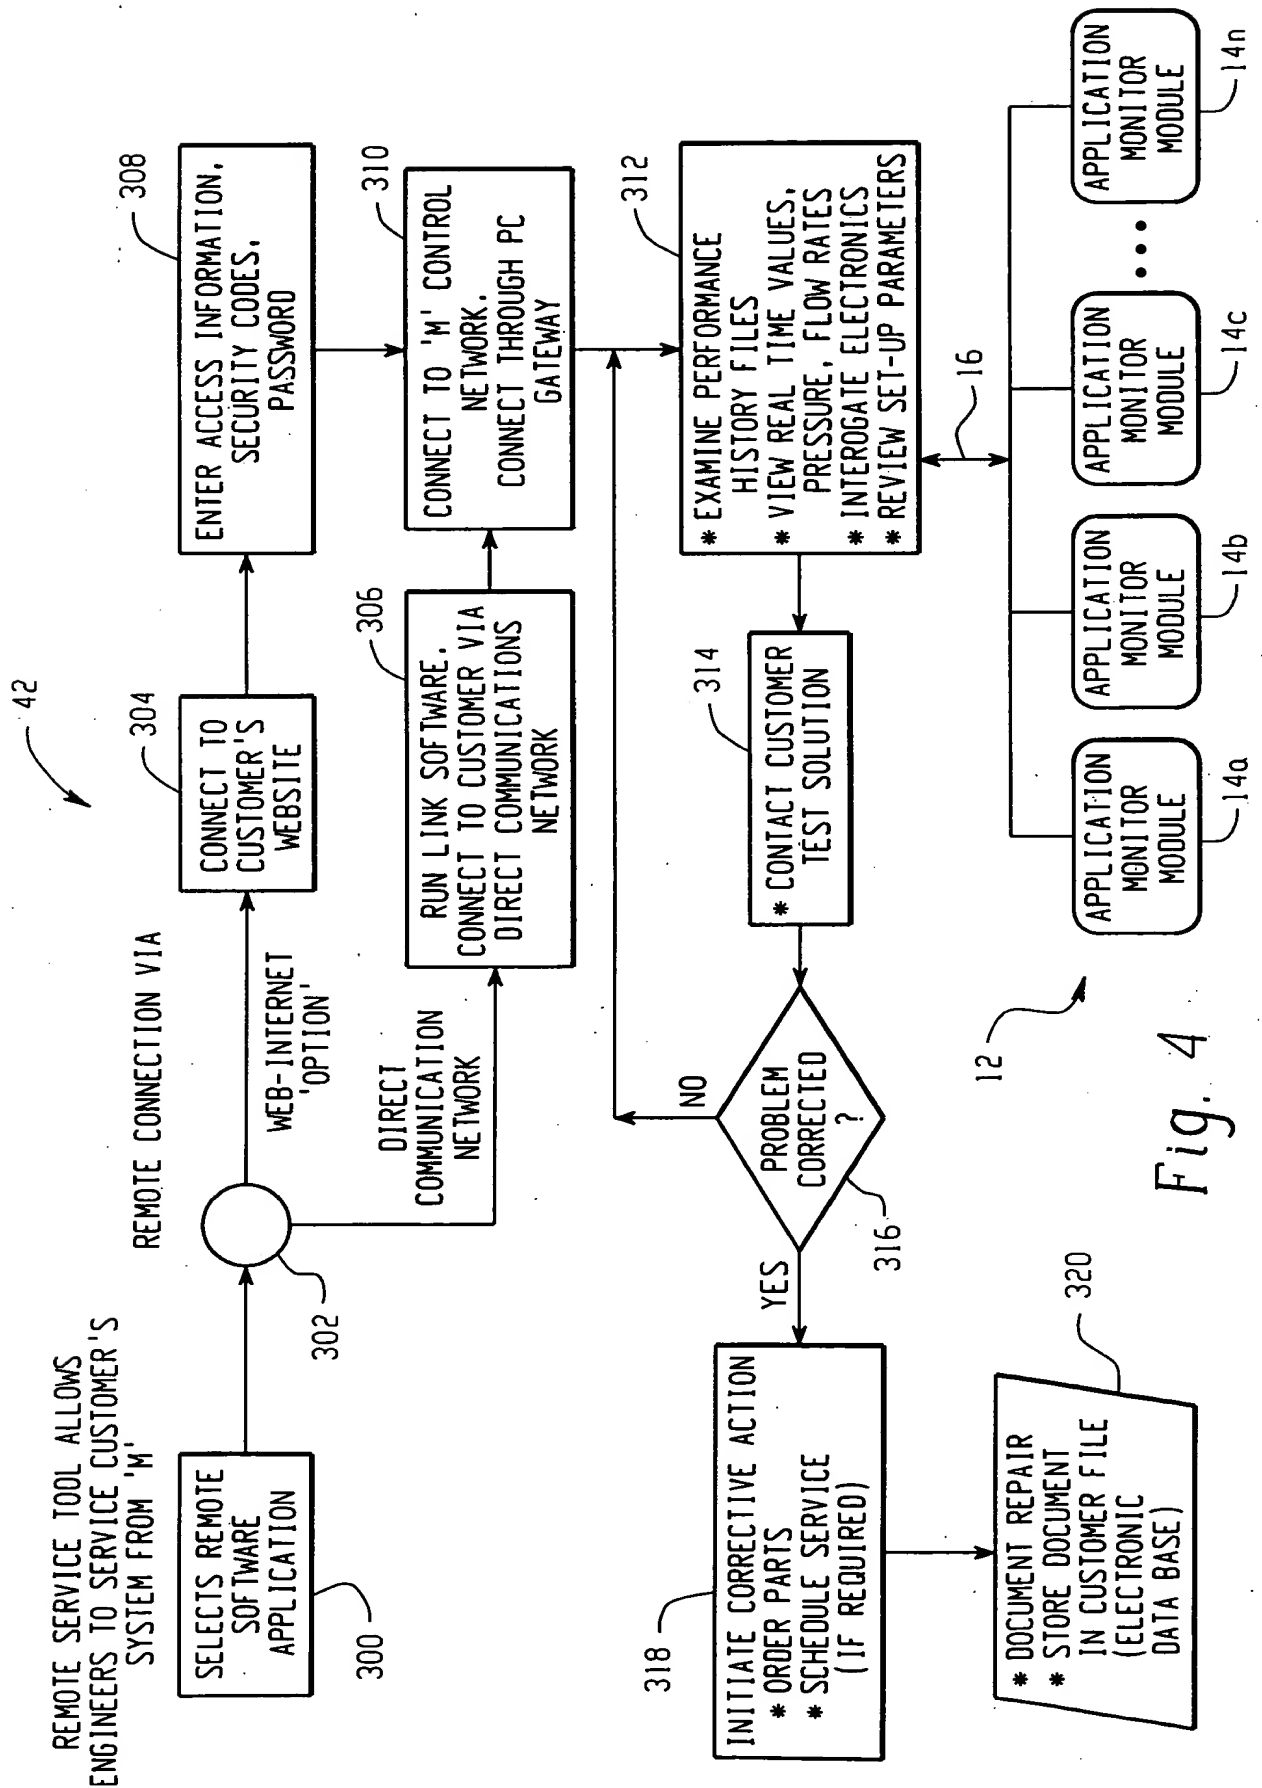

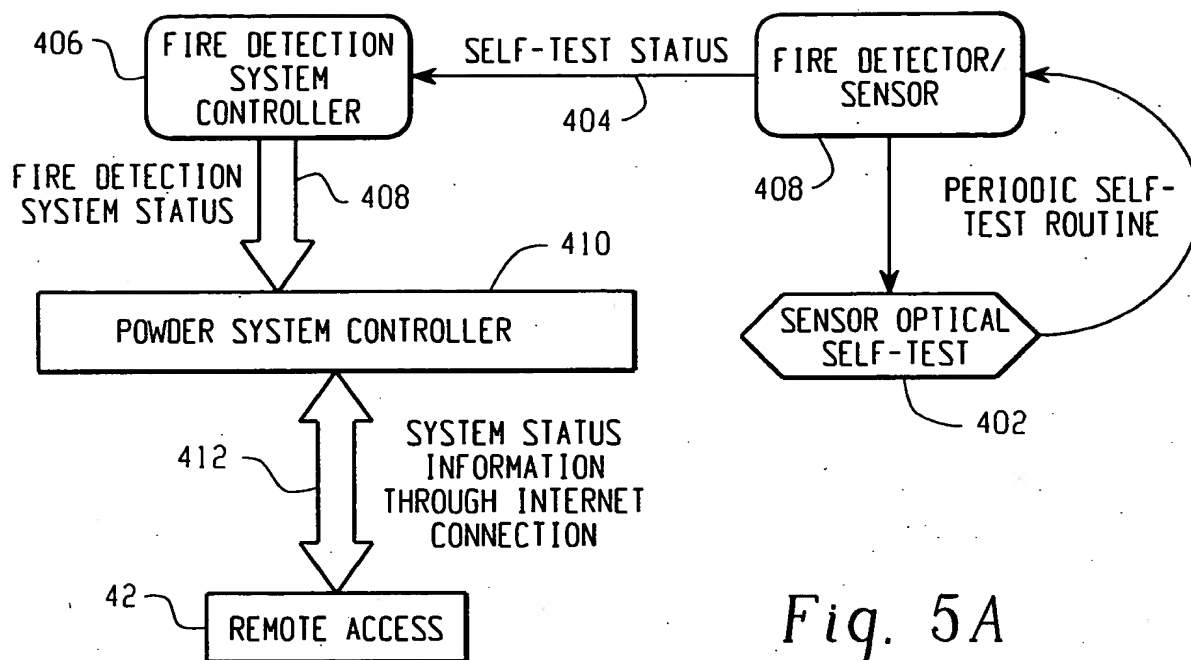


Fig. 5A

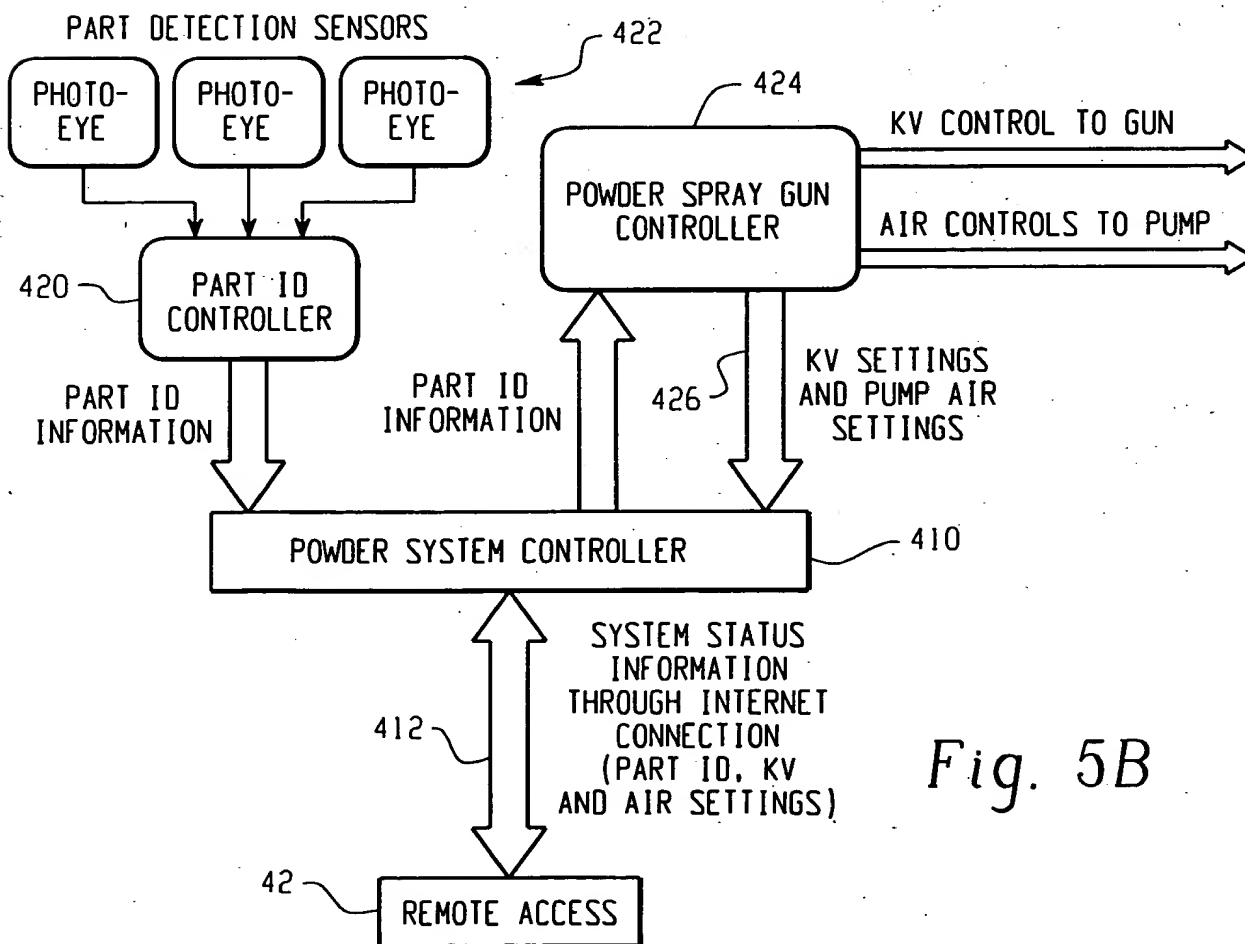


Fig. 5B

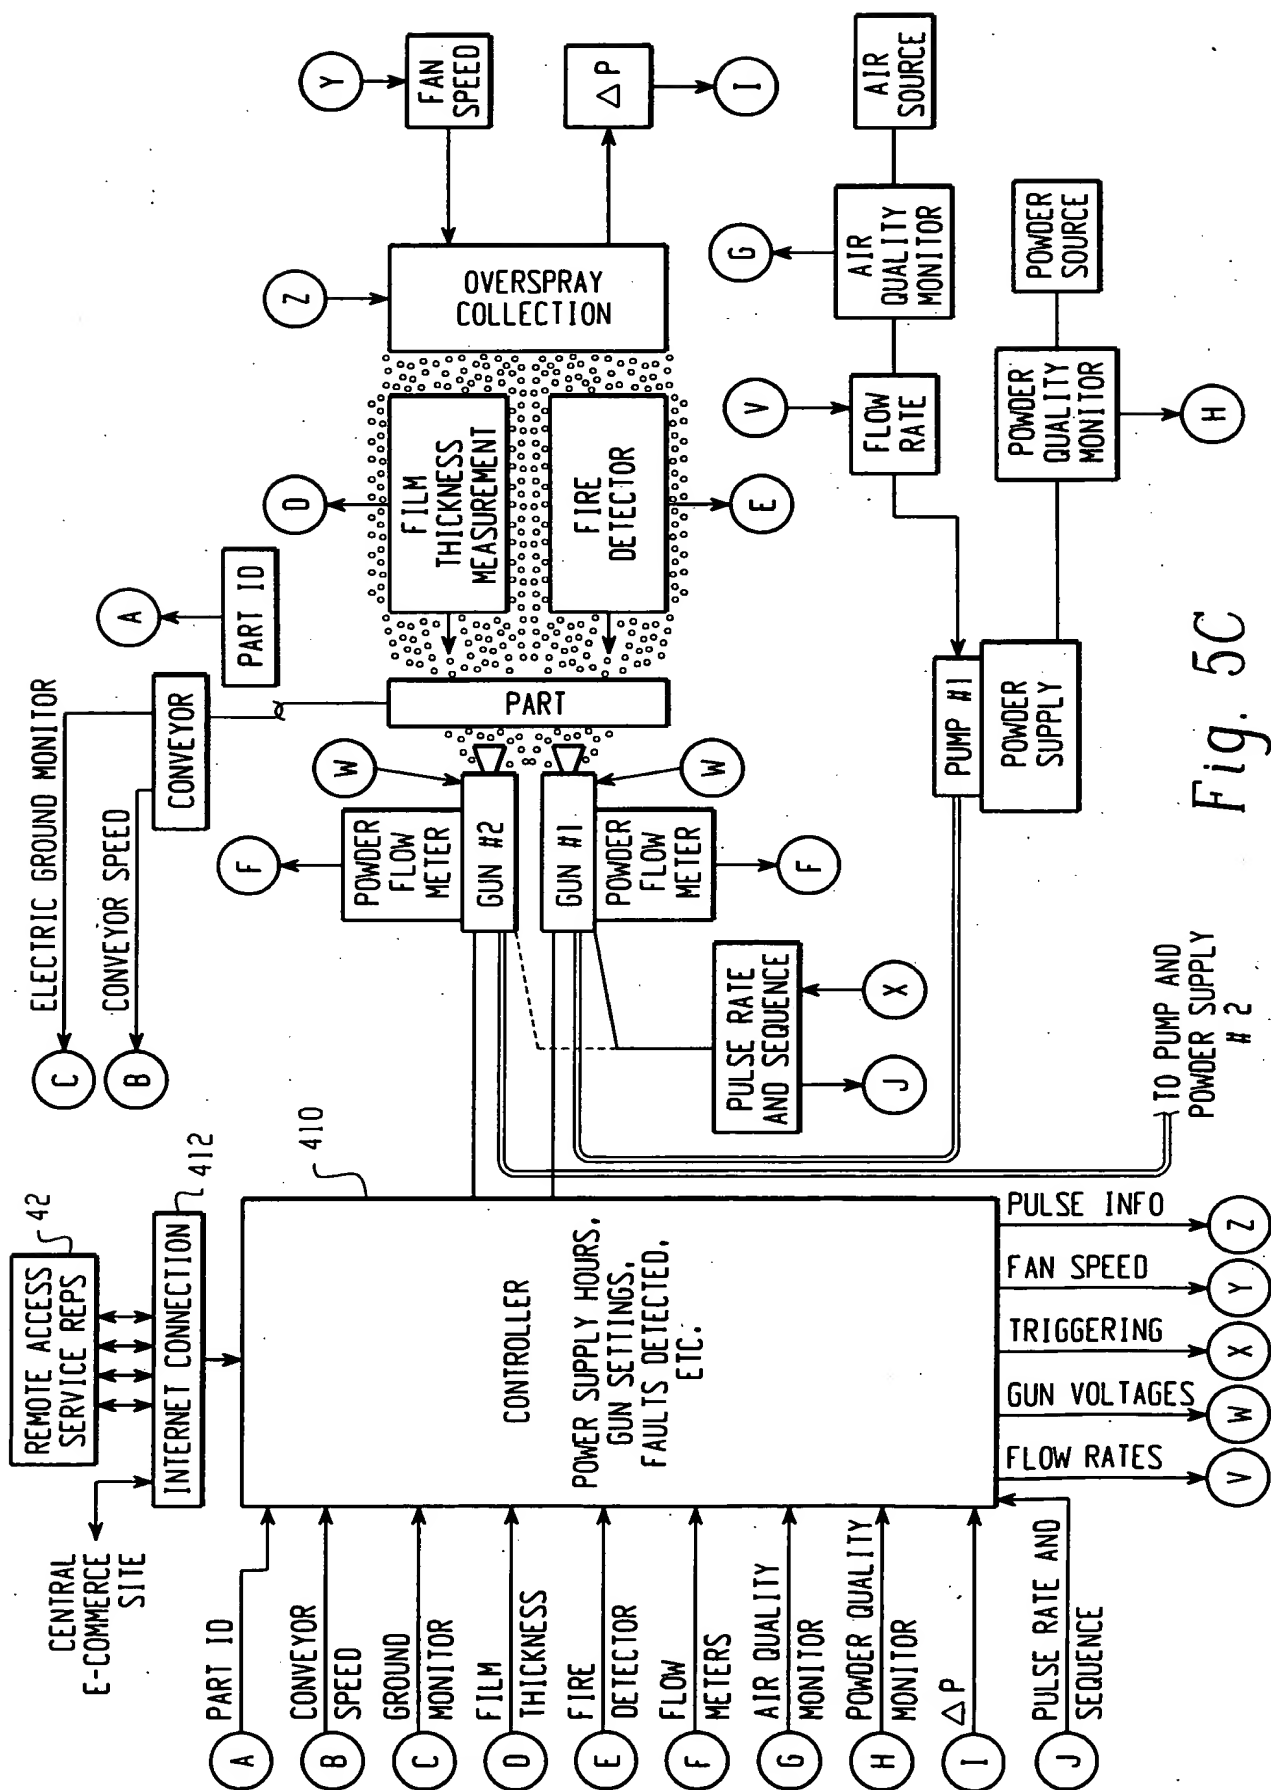


Fig. 5C